



## One Simple Solution for Many Applications.

Whether it's light commercial or residential domestic hot water, the Eternal is the right solution. Its triple pass design provides endless hot water to multiple applications with up to 98% efficiency, and a 15 year residential / 5 year commercial no leak warranty. For more sizing information, please call Eternal Technical Support at 866.946.1096.

### Features

- Stainless Steel Heat Exchanger w/built in 2 gallon reserve tank
- Full flow design and dual activation (thermostat and flow) are compatible with water sense fixtures
- Flexible NG / LP / Indoor / Outdoor / Direct Vent / Power Vent conversions in one unit
- 3" PVC venting up to 100ft
- Clip-on components easily serviced by technicians
- Patented self-cleaning utilizes turbulent flow to flush sediments out
- Digital display screen for adjusting temperature and easy diagnostics

### Benefits

- Endless hot water without water pressure drop
- Up to **98% Efficiency saves cost, 0.96EF** exceeds Energy Star, and qualifies for available government and/or local utility rebates
- Ultra low emissions leaves almost no carbon footprint
- Easy integration with recirculation and no startup lag eliminates cold water sandwich
- Industry's BEST 15 year residential / 5 year commercial heat exchanger no leak warranty

## Big Jobs call for Big Solutions!



For larger residential applications, Eternal GU195M models have the ability to be common vented in parallel up to 4 units, and utilize a multi-controller unit to sync up to 8 units.\*

\*Feature limited to Eternal GU195M models.

## Save Time & Water

Eternal is compatible with most recirculation systems, whether it's a dedicated return line or under-the-sink retrofit pump. The built-in reserve tank within the heat exchanger makes instant hot water possible.


[Optional feature. Consult your authorized Eternal dealer.]



Model		GU145S*	GU195S / GU195M*
Thermal Efficiency / Energy Factor		97% NG / 98% LP / 0.95 Energy Factor	98% NG / 99% LP / 0.96 Energy Factor
Installation		Indoor / Outdoor / Wall Mount / Floor Standing	
Flue System		Sealed Combustion Direct Vent / Power Vent Convertible	
Vent Run	3" PVC	Up to 100ft, 6 Elbows Max, 5ft Deduction Per Elbow	
Condensate Discharge	Low / Med / High Fire	0.5GPH / 1.1GPH / 1.75GPH	
Condensate pH Level		4 pH	
Gas Type		Pre-set for NG / LP Conversion Kit Included	
Unit Connections	Gas and Water	3/4" Female NPT	
	Electricity	Dedicated 120VAC, 60Hz w/3 Pronged Power Cord	
Gas Input Rate	Min / Max	26,000 BTU/Hr / 145,000BTU/Hr	26,000BTU/Hr / 195,000BTU/Hr
Gas Supply Pressure	NG / LP	3.5"WC to 10.5"WC / 8"WC to 14"WC	
Ignition System		Direct Electronic Ignition w/Automatic Flame Sensing	
Burner System		Single Orifice Premixed Fuel Injection Metal Fiber Infrared	
Gas Valve System		Dual Stage Negative Pressure Full Modulation Air Ratio	
Internal Piping Material		S Package - 316L SS / M Package - 316L SS + MCU	
Reserve Tank		Under 2 Gallons	
Electrical Consumption		Standby 8w, Max 45w	Standby 8w, Max 85w
Maximum Noise Level		40dB (a)	50dB (a)
Remote Controller		Up to 3 kits	
Multi Control Unit (MCU)		S Model - Up to 2 units in manifold, No built-in MCU / M Model - MCU up to 8 units in networked manifold, 2 units minimum	
GPM Capacity Range		0.1 to 14.5 GPM	0.1 to 19.5 GPM
Temperature Sensing		Tank, Cold Inlet, Hot Outlet, Air Thermistors	
Temperature Control		Simulation Feed Forward and Feed Back, Computer Controlled Mixing Valve	
Flow Sensing		Dual Flow Sensors w/Built-in GPM Monitor	
Temperature Settings Range		100°F to 180°F in 5°F Steps, Factory Limited to 140°F	
Unit Dimensions (WxHxD)		16.9" x 29.1" x 13.8"	
Unit Weight		90lbs / M Option - 91.5lbs	
Safety Devices		T&P Valve, Flame Rod, Thermal Fuse (306°F), Remaining Flame Detection, Fan RPM Check, Freeze Protection (-40°F), Vent Blockage Detection, Thermostat Switches (167°F / 194°F), Gas Valve Current Leak Detection, Ignition Prevention, Dipswitch Temperature Lock, GFCI w/2 x 5A Fuses	
Accessories		Outdoor Vent Cap Assembly, 3" Horizontal Terminator, Concentric Venting Kit, Remote Controller Kit, Condensate Neutralizer Kit, Water Heater Stand	

\*GU145S and GU195S are for single or dual unit applications with no multi control unit. The GU195M is for multiple unit applications only and cannot be used for single unit applications.

ETERNAL HOT WATER MINIMUM FLOW RATE DATA AT SEA LEVEL

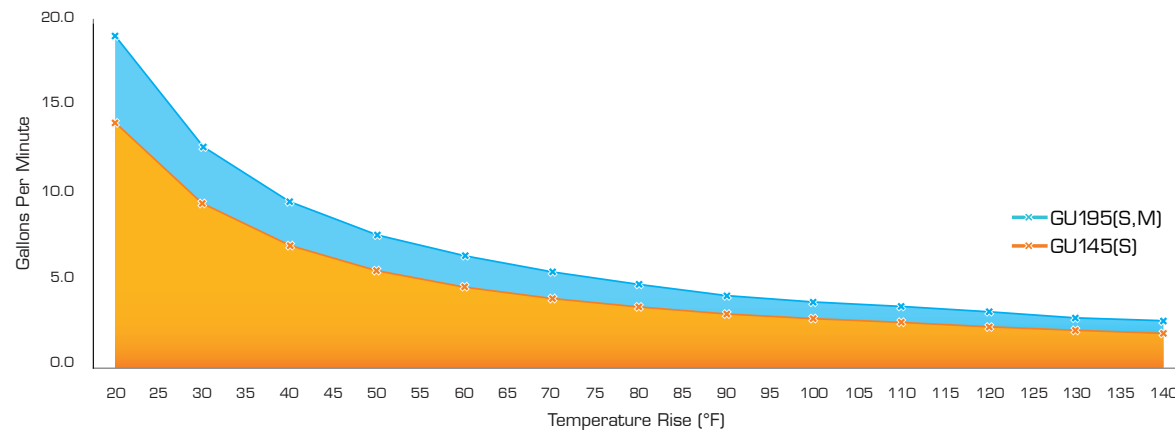

ΔT	GU145	GU195
20°F Rise	14.1 GPMs	19.1 GPMs
30°F Rise	9.4 GPMs	12.7 GPMs
40°F Rise	7.0 GPMs	9.6 GPMs
50°F Rise	5.6 GPMs	7.6 GPMs
60°F Rise	4.7 GPMs	6.4 GPMs
70°F Rise	4.0 GPMs	5.5 GPMs
80°F Rise	3.5 GPMs	4.8 GPMs
90°F Rise	3.1 GPMs	4.2 GPMs



**eternal**  
ADVANCED HYBRID WATER HEATING

Grand Hall USA, Inc. · 3838 W. Miller Road · Garland, Texas, 75041  
Tel: 866-946-1096 · Fax: 972-279-8440 · Email: eternalsales@grandhall.com  
www.eternalwaterheater.com

Part Number: ECFL15  
Flyer Ver: 011314JM

US Patent No 6,945,197 and 8,402,927. / © 2014 Grand Hall · In the interest of product development, Eternal product designs, features and specifications are subject to change without notice.